



LAMP 36 SLIM ENCLOSURE LAMP


Slim and versatile fluorescent lamp. More units can be connected together in a chain up to a total power of 100W, by using the addition interconnection cable including in the packaging.



Features	Unit	LAMP3604	LAMP3605	LAMP3605-115V	LAMP3606	LAMP3606-115V	LAMP3607	LAMP3608
Power supply	V/Hz	230/50	230/50	115/60	230/50	115/60	230/50	230/50
Lamp type	-	T5 fluorescent lamp with integrated electronic ballast						
Power consumption	W	6	8		13		21	28
Service life	hrs	5 000						
Connection	-	Plug-in cable 1.8 m long inside the package						
Series of lamps	-	Possible with male/male extension cable, max 100W total series						
Casing	-	Plastic, white						
Protection degree/class	-	IP20/Class II						
Operating temperature	°C(°F)	-20/+50 (-4/+122)						
Storage temperature	°C(°F)	-45/+80 (-49/+176)						
Mounting	-	Screws, hidden behind the lamp						
Dimensions HxWxD	mm	270x44x22	345x44x22		570x44x22		910x44x22	1210x44x22
Weight	kg	0.33	0.36		0.50		0.53	0.60
Conformity/Certifications	-	CE						

Accessories

Door limit switch without block	FINCOR
Door limit switch	FINRIP
Safety flashing device with lamp switch	FSL
Safety flashing device with lamp and auxiliary switches	FSLA
Plastic bracket	STAF36
Plastic clip	CLIP36

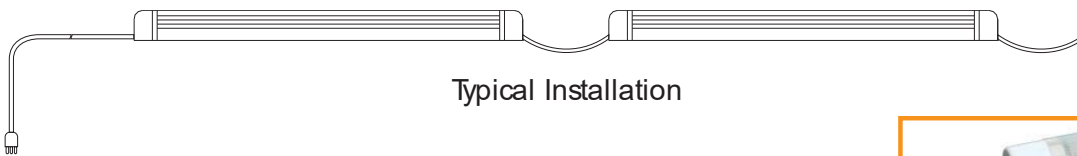


Typical Installation



STAF36



CLIP36

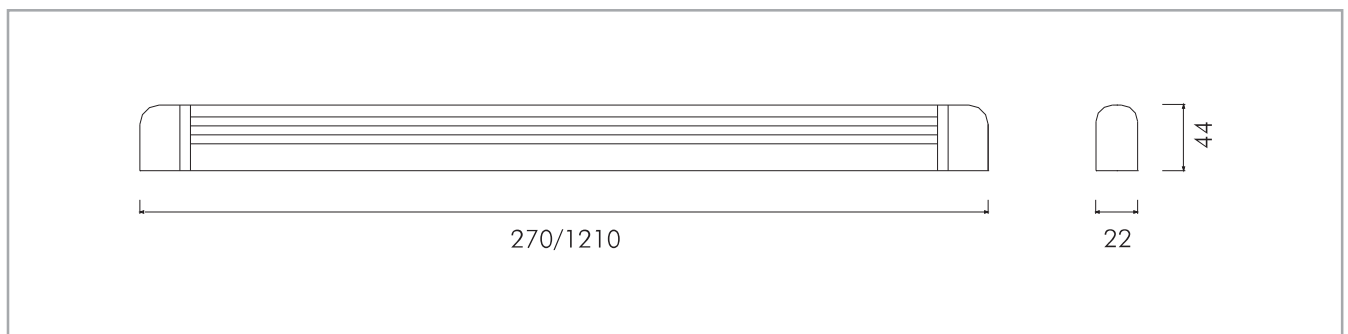

Specifications, values and drawings are subject to change without notice.