

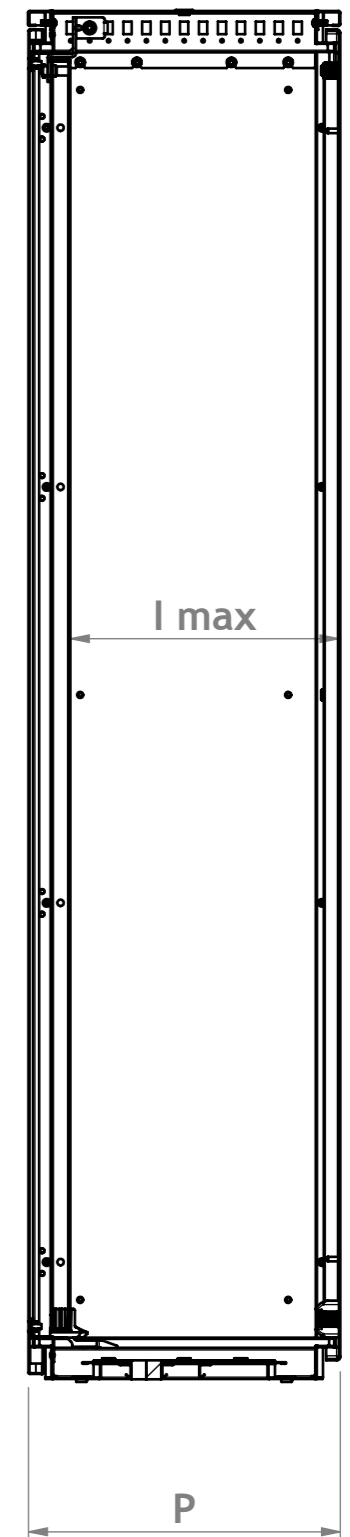


Max area forabile
Available space for machining

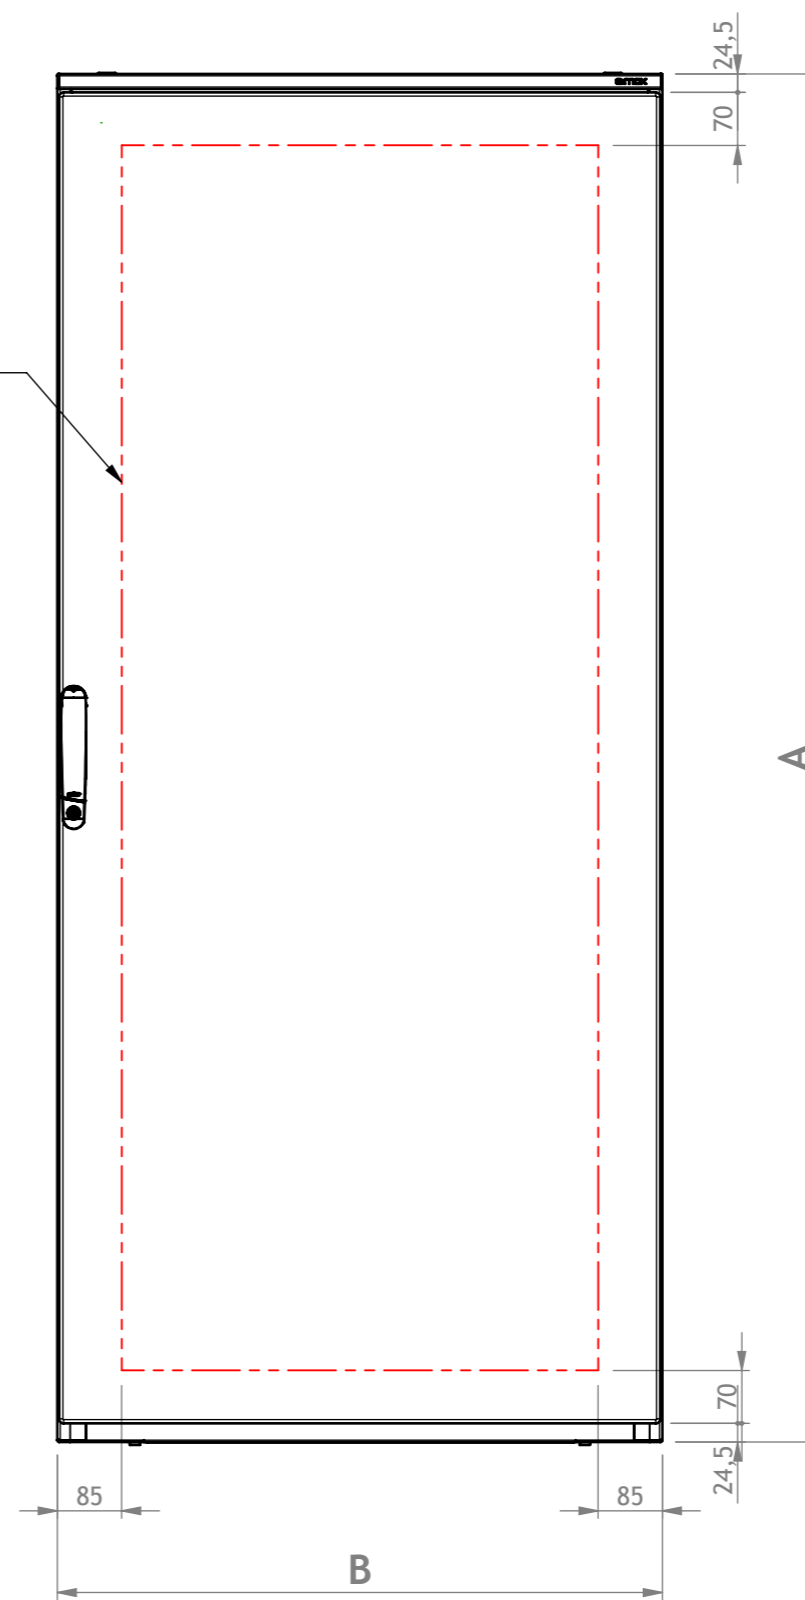

* Per acciaio inossidabile AISI316L aggiungere suffisso H
To order the item in higher grade AISI316L, add the suffix H

Nr. cod.*	Struttura mm Enclosure mm							Accessori/Accessories Piastra P.A mm/Mounting plate		
	B	A	P	C	D	E	F	L	H	I max
EMOX-061604PRX	600	1609	414	395	271	365	220	485	1480	350
EMOX-061804PRX	600	1809	414	395	271	365	220	485	1680	350
EMOX-061805PRX	600	1809	514	395	371	365	320	485	1680	450
EMOX-062004PRX	600	2009	414	395	271	365	220	485	1880	350
EMOX-062005PRX	600	2009	514	395	371	365	320	485	1880	450
EMOX-081604PRX	800	1609	414	595	271	565	220	685	1480	350
EMOX-081804PRX	800	1809	414	595	271	565	220	685	1680	350
EMOX-081805PRX	800	1809	514	595	371	565	320	685	1680	450
EMOX-082004PRX	800	2009	414	595	271	565	220	685	1880	350
EMOX-082005PRX	800	2009	514	595	371	565	320	685	1880	450
EMOX-101804PRX	1000	1809	414	795	271	765	220	885	1680	350
EMOX-102004PRX	1000	2009	414	795	271	765	220	885	1880	350

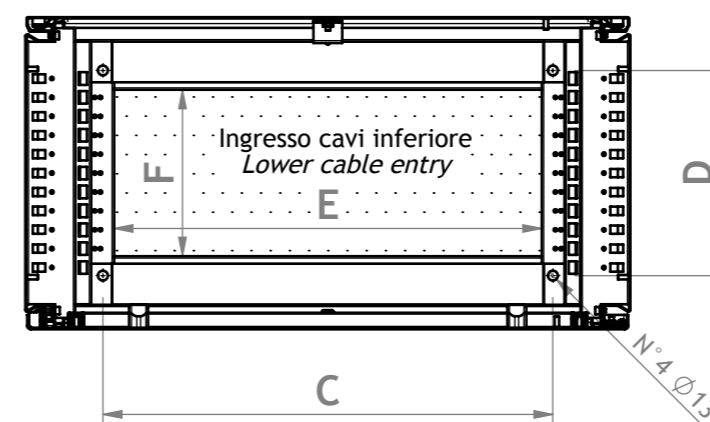

e mox
INOX

E MOX inox
PORTA SINGOLA SINGLE DOOR
Assieme - Overall drawing

eta

7.68.01.12.32.08.01

REV A